


17 Raised design

Indicator 6 mm LED 3 mm, IP 40




Product can differ from the current configuration.

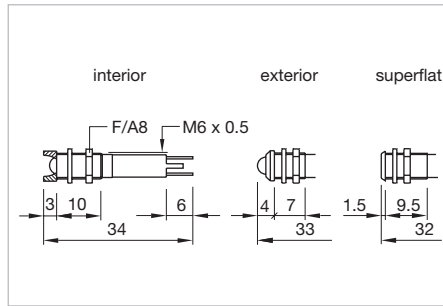

Dimensions [mm]


Equipment consisting of (schematic overview)





Each Part Number listed below includes all the black components shown in the 3D-drawing.

Additional Information

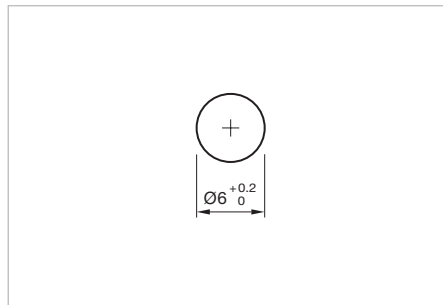- Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-)
- Operating voltage tolerance +10 %
- Operating current tolerance ±15 %





Mounting cut-outs [mm]



Reflector	LED colour	Operating voltage	Operation current	Lumi. intensity	Terminal	Part No.	Weight
 <p>Indicator 6 mm LED 3 mm, Front dimension Ø 7 mm</p>							
Metal satin-chrome, interior	red	24 VDC	15 mA	8 mcd	Plug 2.0 x 0.5 mm	17-030350	0.003 kg
	green	24 VDC	15 mA	6 mcd	Plug 2.0 x 0.5 mm	17-030351	0.003 kg
	yellow	24 VDC	15 mA	6 mcd	Plug 2.0 x 0.5 mm	17-030352	0.003 kg
	green/yellow	24 VDC	15 mA	30/15 mcd	Plug 2.0 x 0.5 mm	17-030356	0.003 kg
	blue	24 VDC	15 mA	26 mcd	Plug 2.0 x 0.5 mm	17-030357	0.003 kg
	white	24 VDC	15 mA	410 mcd	Plug 2.0 x 0.5 mm	17-03035W	0.003 kg
 <p>Indicator 6 mm LED 3 mm, Front dimension Ø 7 mm</p>							
Metal satin-chrome, exterior	red	24 VDC	15 mA	8 mcd	Plug 2.0 x 0.5 mm	17-020350	0.003 kg
	green	24 VDC	15 mA	6 mcd	Plug 2.0 x 0.5 mm	17-020351	0.003 kg
	yellow	24 VDC	15 mA	6 mcd	Plug 2.0 x 0.5 mm	17-020352	0.003 kg
	white	24 VDC	15 mA	410 mcd	Plug 2.0 x 0.5 mm	17-02035W	0.003 kg
 <p>Indicator 6 mm LED 3 mm, Front dimension Ø 7 mm</p>							
Metal satin-chrome, superflat	red	24 VDC	15 mA	8 mcd	Plug 2.0 x 0.5 mm	17-000350	0.003 kg
	green	24 VDC	15 mA	6 mcd	Plug 2.0 x 0.5 mm	17-000351	0.003 kg
	yellow	24 VDC	15 mA	6 mcd	Plug 2.0 x 0.5 mm	17-000352	0.003 kg

Backside

Flat receptacle

Product attribute	Part No.	Weight
 <p>Flat receptacle</p>		
2.0 x 0.5 mm plug-in terminal	31-945	0.001 kg
 <p>Flat receptacle</p>		
2.8 x 0.8 mm plug-in terminal	84-9420	0.001 kg


Insulation sleeve

Product attribute	Part No.	Weight
 <p>Insulation sleeve</p>		
for flat receptacle 2.0 mm	31-928	0.001 kg
 <p>Insulation sleeve</p>		
for flat receptacle 2.8 mm	31-929	0.001 kg



17 Accessories

Mounting


Fixing nut long

Dimension	Part No.	Weight
 <p>Fixing nut long</p>		
Ø 9/M8 x 13 mm	19-991	0.001 kg

Mounting tool

Produkteigenschaften	Part No.	Weight
 <p>Mounting tool</p>		
	01-907	0.02 kg
 <p>Mounting tool</p>		
for fixing nut long Part No. 19-991	19-905	0.011 kg

Drawings

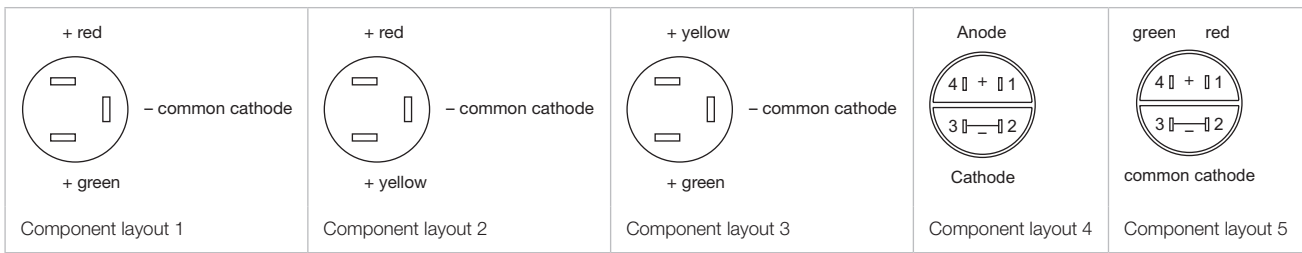

17 Technical data

Technical Data

Material

Actuator

Reflector: Brass satin chrome/black chrome
for indicator 16 mm dia. in black plastic
The plastic (polycarbonate) is limited resistant against chemicals

Mechanical characteristics

Terminals

Plug-in terminal 2.0 x 0.5 mm or 2.8 x 0.8 mm
The indicators with tab-connection are not qualified for soldering

Tightening torque

20 Ncm

Electrical characteristics

Polarity

Anode (+) Brass plug-in connector
Cathode (-) Brass tinned plug-in connector

Operating voltage tolerance

+10 %

Operating current tolerance

±15 %

Optical characteristics

Wave length

red	660 nm
super red	625 nm
hyper red	660 nm
orange	625 nm (for execution 230V: 610 nm)
green	565 nm
yellow/green	570 nm (for execution 230V: 575 nm)
yellow	590 nm
blue	475 nm
red/green	660/565 nm
red/yellow	660/590 nm

Environmental conditions

Storage temperature

-25 °C ... +80 °C

Service temperature

-20 °C ... +60 °C

Protection degree

front IP 40

IP 67 as per DIN EN 60529 - Gap between LED and reflector and gap between reflector and frontplate sealed to IP 67 when using the supplied gasket

Approvals

Approbations

UL
VDE

EAO reserves the right to alter specifications without further notice.