



Illuminated pushbutton, IP 65

Equipment consisting of (schematic overview)

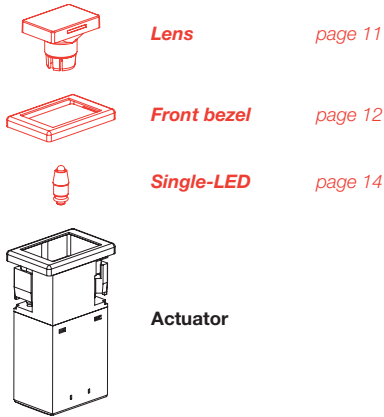


Each Part Number listed below includes all the black components shown in the 3D-drawing.


To obtain a complete unit, please select the red components from the pages shown.

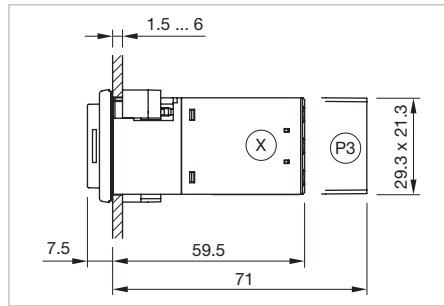

Dimensions [mm]
 P3 = Plug-in terminal 6.3 x 0.8 mm,
 X = Screw terminal

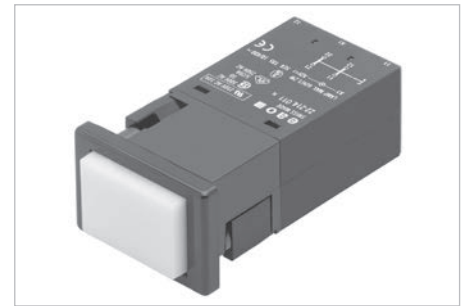


Product can differ from the current configuration.

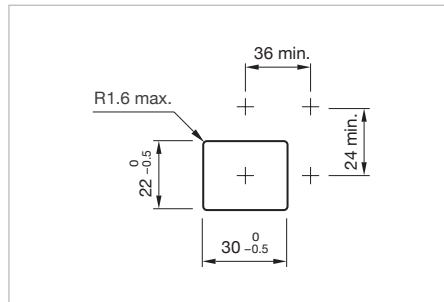

Mounting cut-outs [mm]



Additional Information

- For front dimension 24 x 36 mm
- Switching system snap-action element

Contacts	Switching action	Terminal	Part No.	Wiring diagram	Weight
 <p>Illuminated pushbutton actuator</p>					
1 NC	B	Screw	22-212.011	1	0.037 kg
		Plug 6.3 x 0.8 mm	22-212.014	1	0.032 kg
	C	Screw	22-222.011	2	0.037 kg
		Plug 6.3 x 0.8 mm	22-222.014	2	0.032 kg
1 NC + 1 NO	B	Screw	22-215.011	3	0.044 kg
		Plug 6.3 x 0.8 mm	22-215.014	3	0.034 kg
	C	Screw	22-225.011	4	0.044 kg
		Plug 6.3 x 0.8 mm	22-225.014	4	0.034 kg
1 NO	B	Screw	22-211.011	5	0.037 kg
		Plug 6.3 x 0.8 mm	22-211.014	5	0.032 kg
	C	Screw	22-221.011	6	0.037 kg
		Plug 6.3 x 0.8 mm	22-221.014	6	0.032 kg
2 NC	B	Screw	22-214.011	7	0.044 kg
		Plug 6.3 x 0.8 mm	22-214.014	7	0.034 kg
	C	Screw	22-224.011	8	0.044 kg
		Plug 6.3 x 0.8 mm	22-224.014	8	0.034 kg
2 NO	B	Screw	22-213.011	9	0.044 kg
		Plug 6.3 x 0.8 mm	22-213.014	9	0.034 kg
	C	Screw	22-223.011	10	0.044 kg
		Plug 6.3 x 0.8 mm	22-223.014	10	0.044 kg


Contacts: NC = Normally closed, NO = Normally open
 Switching action: B = Momentary, C = Maintain

22 Flush design

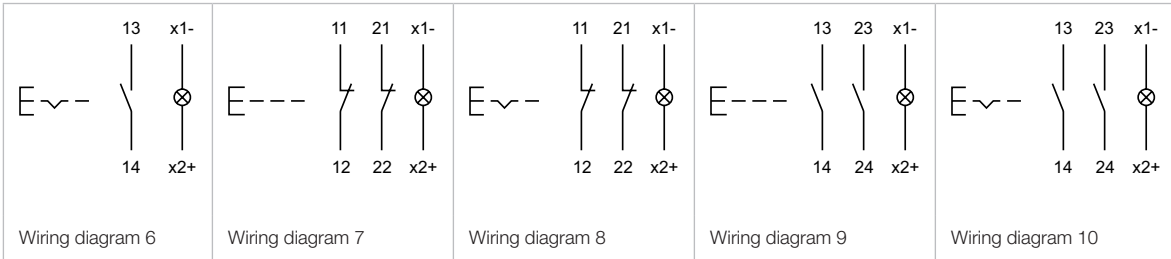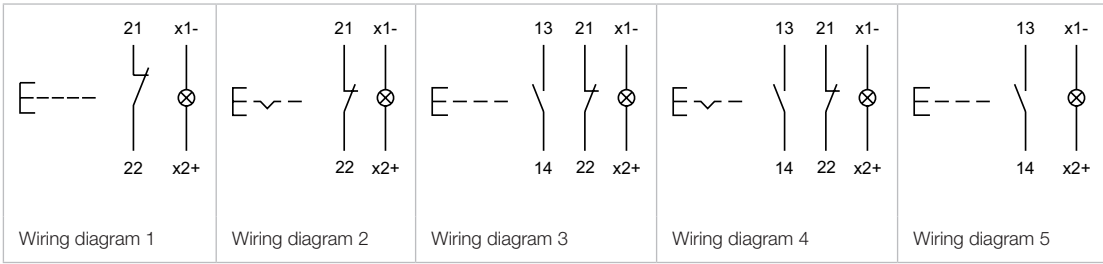

Front


Lens plastic

Product attribute	Dimension	Lens	Part No.	Weight		
 Lens plastic	17 x 25.5 mm	smoked transparent	22-903.1	0.003 kg		
		red transparent	22-903.2	0.003 kg		
illuminative	17 x 25.5 mm	orange transparent	22-903.3	0.003 kg		
		yellow transparent	22-903.4	0.003 kg		
		green transparent	22-903.5	0.003 kg		
		blue transparent	22-903.6	0.003 kg		
		colourless transparent	22-903.7	0.003 kg		
		illuminative, not suitable for film insert, bright LEDs are visible	17 x 25.5 mm	red translucent	22-901.2	0.003 kg
				orange translucent	22-901.3	0.003 kg
yellow translucent	22-901.4			0.003 kg		
green translucent	22-901.5			0.003 kg		
blue translucent	22-901.6			0.003 kg		
white translucent	22-901.9			0.003 kg		
illuminative, less suitable for film insert	17 x 25.5 mm	red transparent	22-905.2	0.003 kg		
		yellow transparent	22-905.4	0.003 kg		
		green transparent	22-905.5	0.003 kg		
		colourless transparent	22-905.7	0.003 kg		
non-illuminative	17 x 25.5 mm	black opaque	22-901.0	0.003 kg		
		grey opaque	22-901.8	0.003 kg		

Mushroom-head cap

Additional Information

- Non-illuminative
- Use only flush front bezel

Dimension	Mushroom-head cap	Part No.	Weight	
 Mushroom-head cap	23 x 35 mm	Plastic black	22-930.0	0.006 kg
		Plastic red	22-930.2	0.006 kg
		Plastic yellow	22-930.4	0.006 kg
		Plastic green	22-930.5	0.006 kg

Front bezel flush

Additional Information

- Lens only removable with lens remover Part No. 02-905

Front bezel	Part No.	Weight
 <p>Front bezel flush, Front dimension 24 x 36 mm</p>		
Pastic black	02-965.0	0.001 kg

Front bezel raised

Additional Information


- Lens only removable with lens remover Part No. 98-969

Front bezel	Part No.	Weight
 <p>Front bezel raised, Front dimension 24 x 36 mm</p>		
Pastic black	02-967.0	0.001 kg


Protective cover, IP 65

Additional Information

- The dimensions of the mounting cut-outs are shown in the product details
- Use only flush front bezel
- Hinged, with means for sealing
- Front panel thickness reduces by 2 mm
- Please not that bigger minimum distances are necessary

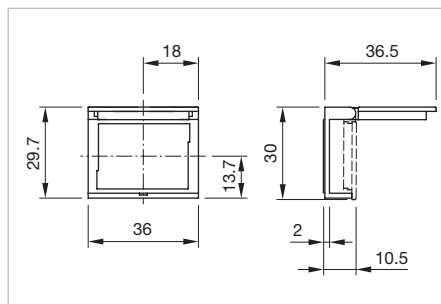

Dimensions [mm]


Mounting cut-out	Material	Optics	Part No.	Weight
 <p>Protective cover</p>				
22 x 30 mm	Plastic	transparent	22-925	0.004 kg

Illumination


Single-LED, T1 3/4 MG


Additional Information

- When using AC/DC types with AC operation, slight flickering can occur
- Luminous intensity data of the LEDs on direct voltage
- Electrical and optical data are measured at 25 °C
- The specified versions are built with a protection diode (half wave rectifier) in series and the LED
- Luminosity and wave length scattering caused by LED manufacturing processes may cause slight variations in the illumination
- For supply voltages above 48V, a voltage reduction element (external series resistor or transformer) must be used
- Due to high surface temperatures, the series resistor must not be soldered directly to the terminals of the equipment (use a terminal plate)

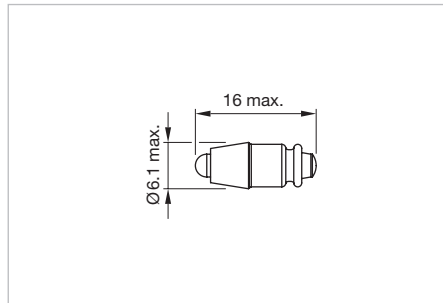


Dimensions [mm]

LED colour	Operating voltage	Operation current	Lumi. intensity	Dom. wavelength	Part No.	Weight
 <p>Single-LED</p>						
red	6 VDC +10 %	15 mA ±15 %	350 mcd	630 nm	10-2J06.3142	0.002 kg
	12 VAC/DC +10 %	7/14 mA ±15 %	330 mcd	630 nm	10-2J09.1062	0.002 kg
	24 VAC/DC +10 %	7/14 mA ±15 %	330 mcd	630 nm	10-2J12.1062	0.002 kg
	28 VAC/DC +10 %	7/14 mA ±15 %	330 mcd	630 nm	10-2J13.1062	0.002 kg
	48 VAC/DC +10 %	4/8 mA ±15 %	200 mcd	630 nm	10-2J19.1042	0.002 kg
yellow	6 VDC +10 %	15 mA ±15 %	300 mcd	587 nm	10-2J06.3144	0.002 kg
	12 VAC/DC +10 %	7/14 mA ±15 %	280 mcd	587 nm	10-2J09.1064	0.002 kg
	24 VAC/DC +10 %	7/14 mA ±15 %	280 mcd	587 nm	10-2J12.1064	0.002 kg
	28 VAC/DC +10 %	7/14 mA ±15 %	280 mcd	587 nm	10-2J13.1064	0.002 kg
	48 VAC/DC +10 %	4/8 mA ±15 %	180 mcd	587 nm	10-2J19.1044	0.002 kg
green	6 VDC +10 %	7 mA ±15 %	1050 mcd	525 nm	10-2J06.3145	0.002 kg
	12 VAC/DC +10 %	4/7 mA ±15 %	1050 mcd	525 nm	10-2J09.1065	0.002 kg
	24 VAC/DC +10 %	4/7 mA ±15 %	1050 mcd	525 nm	10-2J12.1065	0.002 kg
	28 VAC/DC +10 %	4/7 mA ±15 %	1050 mcd	525 nm	10-2J13.1065	0.002 kg
	48 VAC/DC +10 %	2/4 mA ±15 %	600 mcd	525 nm	10-2J19.1045	0.002 kg
blue	6 VDC +10 %	15 mA ±15 %	680 mcd	470 nm	10-2J06.3146	0.002 kg
	12 VAC/DC +10 %	7/14 mA ±15 %	650 mcd	470 nm	10-2J09.1066	0.002 kg
	24 VAC/DC +10 %	7/14 mA ±15 %	650 mcd	470 nm	10-2J12.1066	0.002 kg
	28 VAC/DC +10 %	7/14 mA ±15 %	650 mcd	470 nm	10-2J13.1066	0.002 kg
	48 VAC/DC +10 %	4/8 mA ±15 %	400 mcd	470 nm	10-2J19.1046	0.002 kg
white	6 VDC +10 %	6 mA ±15 %	900 mcd	x0.31/y0.32 nm	10-2J06.3149	0.002 kg
	12 VAC/DC +10 %	3/6 mA ±15 %	900 mcd	x0.31/y0.32 nm	10-2J09.1069	0.002 kg
	24 VAC/DC +10 %	2.5/5 mA ±15 %	750 mcd	x0.31/y0.32 nm	10-2J12.1069	0.002 kg
	28 VAC/DC +10 %	2.5/5 mA ±15 %	750 mcd	x0.31/y0.32 nm	10-2J13.1069	0.002 kg
	48 VAC/DC +10 %	2/4 mA ±15 %	600 mcd	x0.31/y0.32 nm	10-2J19.1049	0.002 kg

LED colour	Operating voltage	Operation current	Lumi. intensity	Dom. wavelength	Part No.	Weight
 <p>Bi-colour LED</p>						
Bi-colour LED red/green	24 VDC +10 %	15/14 mA ±15 %	600/630 mcd	625/525 nm	10-A312.314A	0.002 kg


Filament lamp, T1 3/4 MG

Operating voltage	Operation current	Part No.	Weight
 <p>Filament lamp</p>			
6 VAC/DC	120 mA ±10 %	10-1306.1349	0.001 kg
6.3 VAC/DC	200 mA ±10 %	10-1307.1369	0.001 kg
12 VAC/DC	75 mA ±10 %	10-1309.1309	0.001 kg
14 VAC/DC	80 mA ±10 %	10-1310.1319	0.001 kg
18 VAC/DC	40 mA ±10 %	10-1311.1249	0.001 kg
24 VAC/DC	35 mA ±10 %	10-1312.1229	0.001 kg
28 VAC/DC	30 mA ±10 %	10-1313.1209	0.001 kg
28 VAC/DC	40 mA ±10 %	10-1313.1249	0.001 kg
36 VAC/DC	20 mA ±10 %	10-1316.1179	0.001 kg
36 VAC/DC	30 mA ±10 %	10-1316.1209	0.001 kg
48 VAC/DC	20 mA ±10 %	10-1319.1179	0.001 kg
48 VAC/DC	25 mA ±10 %	10-1319.1199	0.001 kg

Series resistor



Additional Information

- Only for filament lamp 48 VAC, 25 mA
- For lamp voltage reduction
- Keep to the country specific safety instructions
- Due to high surface temperatures, the series resistors must be soldered directly to the terminals of the equipment (use a terminal plate)

Operating voltage	Resistance	Part No.	Weight
 <p>Series resistor</p>			
110 VAC	2.7 kOhm	02-904.0	0.003 kg
125 VAC	3.3 kOhm	02-904.1	0.003 kg
145 VAC	4.7 kOhm	02-904.3	0.003 kg
240 VAC	10 kOhm	02-904.7	0.003 kg

Mounting


Lens remover

Product attribute	Part No.	Weight
 <p>Lens remover</p>		
for flush front bezel	02-905	0.011 kg
 <p>Lens remover</p>		
for raised front bezel	98-968	0.004 kg

Lamp remover

Additional Information


▲ **Caution:** A switching process might be released when replacing the lamp

Part No.	Weight
 <p>Lamp remover</p>	
61-9740.0	0.003 kg

Dismantling tool

Additional Information

- For dismantling the lens from the holder

Part No.	Weight
 <p>Dismantling tool</p>	
22-938	0.030 kg

Actuator with snap-action switching element

Switching system

Self-cleaning, double-break, snap-action switching system (with contact gap 2 x 1.5 mm).
Max. 2 normally closed or 2 normally open contacts, or one of each.

Material

Lens

Polymethylmethacrylate PMMA, as per UL 94 HB, Polycarbonate (PC), as per UL 94 V0

Front bezel

Polyphenylenoxide (PPO)

Material of contact

Hard silver

Actuator housing

Polyamide (PA), Polytherimide (PEI)

Mechanical characteristics

Terminals

Screw terminal (with self-lifting clip):
Max. wire cross-section 2 x 2.5 mm²
Max. wire cross-section of stranded cable 2 x 1.5 mm²

Plug-in terminal 6.3 x 0.8 mm

Actuating force

with 1 switching element 3.6 N ± 0.3 N
with 2 switching elements 6.8 N ± 0.3 N

Actuating travel

5.5 mm ± 0.2 mm

Travel

3 mm

Rebound time

≤ 3 ms

Mechanical lifetime

Illuminated pushbutton 1 million operations
Keylock switch 40 000 operations

Electrical characteristics

Contact resistance

Starting value ≤ 50 mΩ, as per IEC 60512-2-4

Isolation resistance

≥ 100 MΩ between all contacts at 100 VDC, as per IEC 60512-3-1

Switch rating

Power rating
min. 12 VAC, 50 mA
max. 400 VAC, 10 A

Switch rating AC (cos φ 0.7), service category AC-11
Voltage 125 VAC 250 VAC 380 VAC
Current 8 A 5 A 3 A
Operations ≥ 100 000

Switch rating DC (inductive) L:R = 30 ms, service categorie DC-11
Voltage 24 V 60 V 110 V 220 V
Current 6 A 1.5 A 0.4 A 0.2 A
Operations ≥ 100 000

Electric strength

2500 VAC, 50 Hz, 1 min. between all terminals and earth, as per IEC 60512-2-11.

Environmental conditions

Storage temperature

-40 °C ... +95 °C

Service temperature

-25 °C ... +85 °C

Protection degree

Terminal/case IP 20
Front IP 65 as per IEC 60529

Shock resistance

50 g for 11 ms, as per IEC 60512-4-3

Vibration resistance

(sinusoidal)
10 g at 10 Hz ... 2000 Hz, amplitude 0.75 mm, as per IEC 60512-4-4

Approvals

Approbations

CB (IEC 61058)
CSA
ENEC (EN 61058)
UL

Declaration of conformity

CE

General notes

1. Engraving

In addition to the most commonly used world languages, in DIN1451-3 close spacing, other typefaces are available as Scandinavian, Slavic, Greek, Russian and Polish. Red, blue and black lenses are filled with white colour. Other colour lenses are filled in black. Standard height of letters is 3 mm. If the height is not specified, we will supply 3 mm engraved letters.

2. Hot stamping



For larger series it is worth considering markings by means of hot stamping. We will be pleased to advise you. For letters and figures, typefaces with 2.5 mm, 3 mm and 4 mm are available.

3. Film inserts


Instead of using engraving the lenses can be fitted with transparent film inserts, as an alternative. For this purpose, though, it is advisable to use transparent lenses. In the case of use of a smoke-black lens the fitted film becomes readable only if the lamp is on. The film thickness is 0.2 mm. Important : Consider push-button mounting orientation before specifying engraving characters!

Alle Dimensionen in mm

Film insert max. size	Height of letters h	Number of lines	Number of capital letters per line (target value)	Number of small letters per line (target value)	Image
14.3 x 22.4	3	4	11	13	B1
			7-8	8-9	B2
	4	2	7	9	B1
			4	5-6	B2
	5	2	5-6	6-7	B1
			3	4	B2
	6	1	5	6	B1
			3	4	B2
	8	1	3	4	B1
			2	2	B2



B1



B2

