



Pin.No	Symbol	Level	Function
1	VSS	—	GND(0V)
2	VDD	—	Power Supply (+5V)
3	V0	—	Operating Voltage for LCD
4	RS	H/L	H: data ; L: Instruction code
5	R/W	H/L	H: read ; L: write
6	E	H/L	Enable Signal
7-14	DB0-DB7	H/L	Data Bus
15	A	—	Power supply for LED backlight (+5V)
16	K	—	Power supply for LED backlight (-)



ABSOLUTE MAXIMUM RATING					
Item	Symbol	Min	Type	Max	Unit
Operating Voltage	VDD	4.8	5.0	5.2	V
Operating Current	I _{DD}	-	1.8	2.2	mA
LED Voltage	V _{LED}	4.8	5.0	5.2	V
LED Current	I _{LED}	-	340	-	mA


Description	
1.	DISPLAY TYPE: STN POSITIVE YELLOW-GREEN (STN NEGATIVE BLUE).
2.	Viewing Direction: 8 O'CLOCK.
3.	Polarizer Mode: Transflective (Reflective, Transmissive).
4.	Color of Backlight: Yellow/Green (White).
5.	Operating Temp: 0° ~ 50°C.
6.	Storage Temp: -10° ~ 60°C.
7.	Character Table: English; Japanese; European; Cyrillic.
8.	Operating Voltage Option: 5.0V

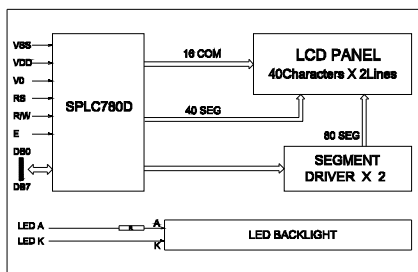

BUNSUN ELECTRONICS CO., LIMITED

DESCRIPTION: C/D	
GENERAL	TOL UNIT
±0.20	mm

BN-C4002A
DO NOT SCALE THIS DRAWING



APPROVALS	DATE
APP:TSANG	
DWN:JABY	24.2.12