


Description	
Joystick Type SK 315-020	
Number of axes	2-axes, x-axis, y-axis both axes are redundant
Operation by	Handle with Pushbutton
Cross guidance	soft
Retaining spring	normal, Z-Nr. 60-112
<u>Connector:</u>	Minitek Shrouded Header 90°, 8-poles
<u>Mating connector:</u>	Minitek IDC Receptacle, 8-poles
Electrical characteristics	
Operating voltage	5 V DC
Sensor	Hall effect
Pin	
01	Supply voltage
02	x1 (-x=0.5V, middle=2.5V, +x=4.5V)
03	Ground
04	y1 (-y=0.5V, middle=2.5V, +y=4.5V)
05	y2 (-y=0.5V, middle=2.5V, +y=4.5V)
06	Center tab
07	x2 (-x=0.5V, middle=2.5V, +x=4.5V)
08	Pushbutton ground

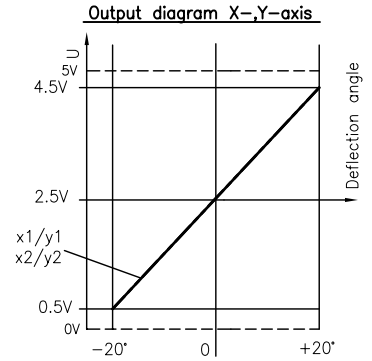

				Oberfläche	Maßstab 1:1	Position	Menge
				Datum	Name	Joystick	
				Bearb. 09.08.2012	DR		
				Gepr.			
				Norm			
				GENGE & THOMA AG <small>OT-2543 Lengnau/Blis</small>			Blatt
a	Elektr. Änderungen	24.09.12	MK	Dateiname: E:\Dwg\SK_315\L\SK315-020a.dwg			Bl
Zust.	Änderungen	Datum	Name				