


KEL-DPZ 6

Cable Entry Plates

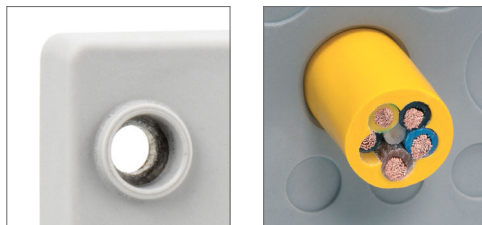

Description

Type

Order No.

Number of
cables

PU

	KEL-DPZ 6 12	43809	12 x 4.5 - 8.0 mm / 0.18 - 0.31"	10
	KEL-DPZ 6 18-1	43811	7 x 4.5 - 8.0 mm / 0.18 - 0.31" 5 x 3.2 - 6.5 mm / 0.13 - 0.26" 6 x 2.5 - 5.0 mm / 0.10 - 0.20"	10
	KEL-DPZ 6 18	43812	18 x 3.2 - 6.5 mm / 0.13 - 0.26"	10
	KEL-DPZ 6 23	43813	10 x 3.2 - 6.5 mm / 0.13 - 0.26" 13 x 2.5 - 5.0 mm / 0.10 - 0.20"	10
	KEL-DPZ 6 27	43814	27 x 2.5 - 5.0 mm / 0.10 - 0.20"	10

Product Description

KEL-DPZ 6 entry plates are designed to route and seal a high number of cables without connectors or fiber optics (from 2.5 mm to 8 mm in diameter) in limited space.

The size KEL-DPZ 6 matches exactly the cut-out dimensions of 6-pin standard industrial connectors.

The assembly of the KEL-DPZ 6 with cables or pneumatic hoses can be done quick and easy. Simply make a small hole in the thin membrane, push the cables through. The KEL-DPZ 6 provides strain relief and protection up to IP66. ST-B Plugs can be used for sealing pierced membranes if cables have been removed.

Advantages & Benefits

- Fast and easy assembly
- High cable density
- Dual sealing acc. to IP65/IP66
- Automatic sealing and strain relief for the cable
- Hygienic design

Specifications

Material	Frame: Stainless steel V2A Sealing plate: Elastomer
Color	gray (similar RAL 7035)
Flame class	UL94-Vo
IP rating	IP65/IP66 (certified acc. to EN 60529)
Operating temperature	- 40°C to + 100°C (static) - 40°F to + 212°F (static)
Properties	Halogen-free, silicone-free
Cut-out dimensions	36 x 52 mm / 1.417 x 2.05"
Plate depth	7,5 mm

Accessories

ST-B Plugs	93
KEL-EMC-PF Grounding mounts	149
FP Flanged plates	194 - 203